


Manual call point ROP 65 is intended for person who notice fire. By manual pressing, user gives information to the FAS control unit to activate fire alarm. This device can operate on detection loops or stub detection circuits controlled by the FAS alarm control unit only. Device is activated by braking the glass. To rearm element, glass need to be replaced. The element has a double-sided short circuit isolator.



FEATURES OF MANUAL CALL POINT ROP 65

- > integrated short-circuit isolator on both sides
- > type of call point activation - A
- > restoration of supervisory state by changing the glass panel
- > operation in addressable systems
- > status light
- > indoor and outdoor use

DIMENSIONS [mm]

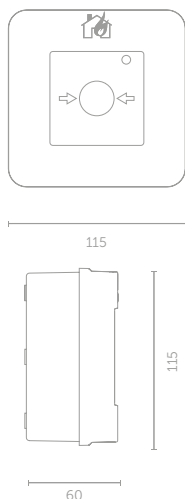

TECHNICAL DATA

FEATURE	MANUAL CALL POINT ROP 65
SUPPLY VOLTAGE	24 [VDC] ± 25%
QUIESCENT CURRENT CONSUMPTION	<130 [µA]
ALARM CURRENT CONSUMPTION	<500 [µA]
ENVIRONMENTAL CATEGORY	INTERNAL / EXTERNAL
IP HOUSING	IP65
OPERATING TEMPERATURE	-25 UP TO 70 [°C]
ADMISSIBLE RELATIVE HUMIDITY	95% AT 40 [°C]
DIMENSIONS	115x115x60 [mm]
ACTIVATION TYPE	A
WEIGHT	270 [g]
CASING COLOUR	RED
PRODUCT CODE	FSR002