




Features

- 1/3 inch 960H CCD
- Ultra High Resolution : 700 TV Lines
- TDN(ICR), DNR, OSD
- Min. Illumination : 0.01Lux (B/W)
- Privacy Zone, Motion Detection
- Eclipse, Mirror Function
- 12VDC

DIMENSIONS

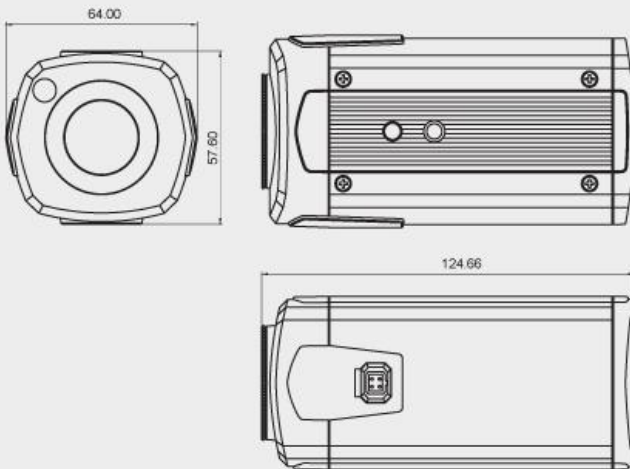

SPECIFICATIONS

Model	BBD-50F	BBD-51F
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch 960H CCD	
Effective Pixels	976(H) x 494(V) 480K	976(H) x 582(V) 570K
Horizontal Resolution	700 TV Lines	
Video Output Level	1.0V p-p (75Ω Unbalanced, Composite)	
S/N Ratio	More than 50dB(AGC Off)	
Lens Mount	CS Mount	
Day & Night Type	ICR(AGC type)	
Min.Illumination	0.05Lux(Color), 0.01Lux(B/W), F1.2, 30IRE	
OSD	7 Languages (English, Japanese, German, French, Russian, Portuguese, Spanish)	
White Balance	ATW, PUSH, USER1, USER2, ANTI CR, MANUAL, PUSH LOCK	
AGC	AUTO(OFF, 37dB), MANUAL(6.00dB ~ 44.80dB)	
BLC	Off, Auto, User(Zone adjustable)	
DNR	Off / 2D	
Eclipse	On / Off	
Motion Detection	On / Off (4 Zone)	
Privacy Zone	On / Off (4 Zone)	
Mirror	On / Off (Horizontal)	
Operating Temp. / Humidity	-10℃ ~ +50℃ / 30% ~ 80% RH	
Storage Temp. / Humidity	-20℃ ~ +60℃ / 20% ~ 90% RH	
Electronic Shutter Speed	1/60~1/100,000 Sec.	1/50~1/100,000sec.
Supplied Voltage	12VDC (-10%, +20%)	
Power Consumption	Max. 2W / 170mA	
Dimensions(WxHxD)	64(W) x 57.6(H) x 124.66(D) mm	
Weight	Approx. 335g	