

DSP1202A 150W Outdoor Horn Speaker

Features



- Outdoor, waterproof speaker
- Built-in 100v/70v transformer
- Max SPL: 116±2dB
- Wide Freq.Resp.: 42Hz -20 kHz
- High sensitivity: 94±2dB
- Equipped with bracket for installation convenient

Description

DSP1202 is an outdoor speaker with built in 100v transformer. The 100v transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.


This speaker is designed of wide frequency response (42Hz-20kHz); It is of high quality and can ensure long-term durability, and will never be out of shape; Equipped with bracket for hanging on wall. Driver surround excellent damping, long life, clear and sonorous sounds.

It can be applied to different occasions vary in area sizes and background noises, such as station, park, school, square, military camp, industrial park, etc.


Specification

MODEL	DSP1202
Rated Power	150W
Max Power	250W
Line Voltage	100V
Sensitivity(1M,1W)	94±2dB
Max SPL(1M)	116±2dB
Freq. Resp	42Hz -20 kHz
Dimensions(H*W*L)	580*430*310mm
Weight	21kg


Positioning & Dimensions




图一



图二



图三




图四

Installation

1. Select appropriate position , and set the speaker system as above;
2. Connect audio broadcasting wire to the terminal, and insert the terminal into plug receptacle , and fixed ;
3. Adjust the direction of the set and examine whether it is steady.

FREQ. RESPONSE

(dB SPL、1W、1m)

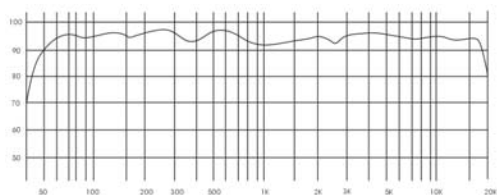

DISTORTION

(THD< 1.5% 1W、1m、100Hz~10kHz)

