


CODE: **AWO200K** v.1.2/V  
NAME: **Enclosure 17/TRP50/DSPR/L/two-level**

EN

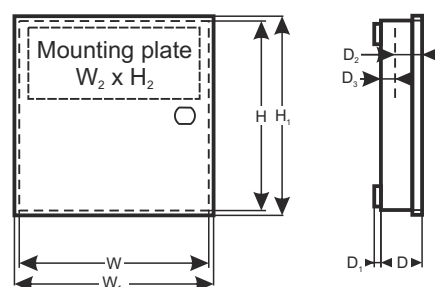

## DESTINATION

### DSC:

*Power Series Neo*

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

*Power Series*

Alarm control panels: PC1616, PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

*Power Series Pro*

Alarm control panels: HS3032, HS3128, HS3248.

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

### EBS:

Alarm control panels: PX 202A

### PARADOX:

Alarm control panels: 728 ULT, E55, 65, SP4000, SP5500, 6000, 7000, EV048, 192.

Modules: ZX4, ZX8, ZX8SP, APR3- HUB2, PGM4.

### PYRONIX:

Alarm control panels: MATRIX 424, 6/816, 832, 832+.

### RISCO:

Alarm control panels: PRO24, 116, 128, 140.

Modules: RP296EPS

### ROEL:

Alarm control panels: SIGMA 6,12, CERBER.

### ROGER:

Alarm control panels: PR402, CPR 32- SE.

### SATEL:

Alarm control panels: Integra32, 24, 64, 128, 128+, 256+, Versa5,10, 15 Plus, IP, Perfecta16, 32, 32 LTE -T 32, Micra, CA-10 P, CA-6 P, CA-5 P, CA-4 VP.

Modules: CA-64 PTSA, CA-10 E, ETHM-1 Plus, ETHM-2,GSM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

### TELMOR:

Alarm control panels: TCA-824, TEX800.

**Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.**

## TECHNICAL DATA

External dimensions of enclosure:	W=348, H=433, D+D <sub>1</sub> =141+8 [+/- 2mm]
External dimensions of front panel:	W <sub>1</sub> =354, H <sub>1</sub> =438 [+/- 2mm]
Mounting plate dimensions:	W <sub>2</sub> =310, H <sub>2</sub> =135 [+/- 2mm]
Working depth 1/2:	D <sub>2</sub> =62, D <sub>3</sub> =75 [+/- 2mm]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRP 50VA/16V/18V/20V in PC/ABS enclosure, class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50Hz, 250mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC or U3=20 V AC (-5%,+15%), I1=3,0A or I2=2,8A or I3=2,5A (max.)
Net/gross weight:	6,3 / 7,0 [kg]
Operating environment:	II environmental class, -10°C + +40°C
Material description:	sheet steel DC01, thickness: 1mm, anticorrosion protection, color: RAL 9003
Destination:	inside
Tamper switch protection:	1 x microswitch: enclosure opening 0,5A; 50 V DC max. NC – normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ066)
Closing:	screwed: screw x 1
Notes:	lock assembly possible, distance from the wall (mounting surface) – 8mm
Declaration, warranty:	CE, 2 years from production date